




ENGINEERED POWER LP

LIRDD-HT

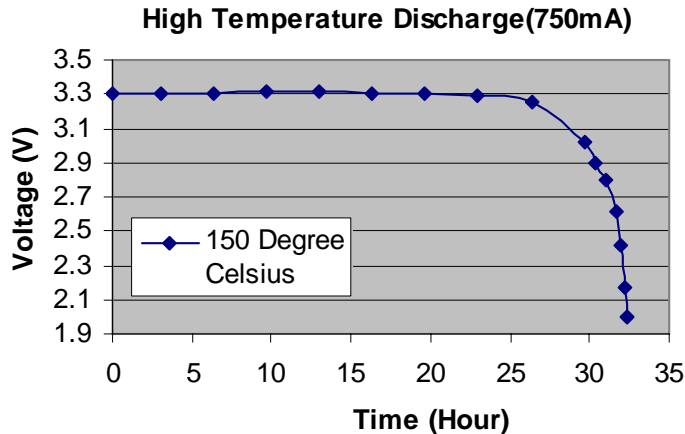

**Primary
High Energy
High Temperature
High Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 24.0 Ah

Rated Current: 750 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions: 5.00 inch (126.2 mm) x 1.25 inches (31.8 mm) diameter

Weight: 7.2 ounces (205 grams ±5 grams)

Suitable Applications: Transceivers, Sonobuoys, Memory Backup, Oil Well Instrumentation, Measurement While Drilling (MWD), Logging While Drilling (LWD), High Shock & Vibration Application.

ENGINEERED POWER LP

WHEN PERFORMANCE COUNTS

#109, 1120 – 53rd Ave N.E.
Calgary, Alberta, T2E 6N9
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: March 2006